Nipples and Adapters





(back row from left to right) AD275C40K7L175, N500, N700 (front row from left to right) AD275C40K2L175, N250



N700 with mounting hardware




AD275C40K7L175 with mounting hardware

Nipple Description: Vacuum nipples reduce the insertion length of the Extorr RGA probe. All nipples are made from 304 stainless steel and have DN 40 CF, 2.75 inch ConFlat (CF) flanges at both ends. Nipples come in 7.50 inch OAL, 5.50 inch OAL, and 2.50 inch OAL options. Stainless steel mounting hardware and copper gaskets are included.

Adapter Description: Adapters reduce the insertion length of the Extorr RGA probe. All adapters are made from 304 stainless steel and have a DN 40 CF, 2.75 inch CF flange at one end and a DN 40 KF flange at the other end. Adapters come in 7.50 inch OAL and 2.50 inch OAL options. Stainless steel mounting hardware and copper gaskets are included.

Nipple Specifications

Adapter Specifications

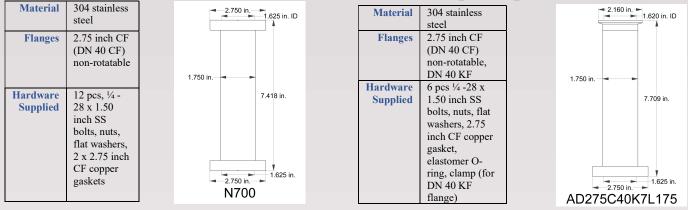

Ordering Information

Product Number	Description
N700 (Nipple)	2.75 inch OD CF flanges (DN 40 CF), 7.50 inches
	OAL, 1.75 inches OD
N500 (Nipple)	2.75 inch OD CF flanges (DN 40 CF), 5.50 inches
	OAL, 1.75 inches OD
N250 (Nipple)	2.75 inch OD CF flanges (DN 40 CF), 2.50 inches
	OAL, 1.75 inches OD
AD275C40K7L175 (Adapter)	Adapter with 2.75 inch OD CF flange (DN 40 CF) to
	DN 40 KF flange, 7.75 inches OAL, 1.75 inches OD
AD275C40K2L175 (Adapter)	Adapter with 2.75 inch OD CF flange (DN 40 CF) to
	DN 40 KF flange, 2.50 inches OAL, 1.75 inches OD

Extorr, Inc. 307 Columbia Road New Kensington, PA

Phone: 724-337-3000 www.extorr.com 1/10/2023 3:39 PM