


Double Valve Sampling Inlet



Description: The Double Valve Sampling Inlet has two metal sealed on-off valves mounted on a DN 40 CF, 2 ¾ inch ConFlat (CF) flange with Swagelok type nuts and ferrule fittings for connecting to capillary tubing. The inlet assembly is made from 304 stainless steel, and the fittings come in 1/16 inch, 1/8 inch, 3/16 inch, and 1/4 inch ID options. One or both of the fittings can be a specific ID. Stainless steel mounting hardware, as well as a 2 ¾ inch CF copper gasket are included.

Specifications

Material	304 stainless steel
Inlet Flange	2 ¾ inch CF (DN 40 CF) non-rotatable
Weight	1.5 lbs
Hardware Supplied	6 pcs; ¼ - 28 x 1.5 inch stainless steel bolts, nuts, flat washers, and a 2 ¾ inch CF copper gasket. Stainless steel swagelok type nut and ferrule – for use with stainless steel capillary tubing. 1/16 inch fittings come with an additional vespel/graphite ferrule as well as a capillary plug – for use with glass capillary tubing.
Inlet Valve	Metal sealed
Capillary Fitting	Swagelok type nut and ferrule

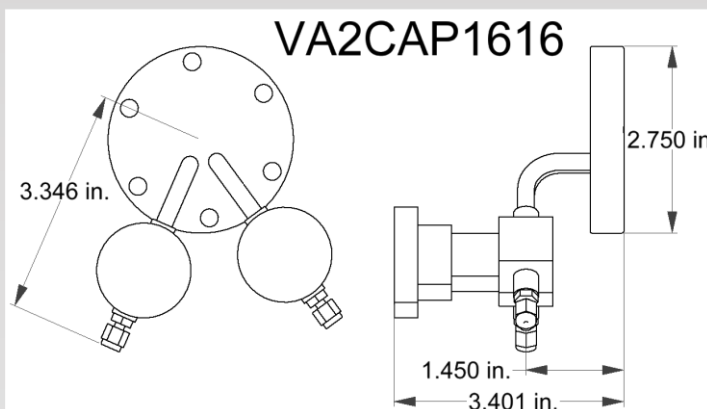

Ordering Information

Product Number	Description
VA2CAP1616	Valve inlet assembly with 2 x 1/16 inch fittings; 2 metal sealed on-off valves mounted on 2 ¾ inch CF flange (DN 40 CF)
VA2CAP168	Valve inlet assembly with 1/16 inch fitting and 1/8 inch fitting; 2 metal sealed on-off valves mounted on 2 ¾ inch CF flange (DN 40 CF)
VA2CAP164	Valve inlet assembly with 1/16 inch fitting and 1/4 inch fitting; 2 metal sealed on-off valves mounted on 2 ¾ inch CF flange (DN 40 CF)
VA2CAP163	Valve inlet assembly with 1/16 inch fitting and 3/16 inch fitting; 2 metal sealed on-off valves mounted on 2 ¾ inch CF flange (DN 40 CF)
VA2CAP88	Valve inlet assembly with 2 x 1/8 inch fitting; 2 metal sealed on-off valves mounted on 2 ¾ inch CF flange (DN 40 CF)
VA2CAP84	Valve inlet assembly with 1/8 inch fitting and 1/4 inch fitting; 2 metal sealed on-off valves mounted on 2 ¾ inch CF flange (DN 40 CF)
VA2CAP83	Valve inlet assembly with 1/8 inch fitting and 3/16 inch fitting; 2 metal sealed on-off valves mounted on 2 ¾ inch CF flange (DN 40 CF)
VA2CAP44	Valve inlet assembly with 2 x 1/4 inch fitting; 2 metal sealed on-off valves mounted on 2 ¾ inch CF flange (DN 40 CF)
VA2CAP43	Valve inlet assembly with 1/4 inch fitting and 3/16 inch fitting; 2 metal sealed on-off valves mounted on 2 ¾ inch CF flange (DN 40 CF)
VA2CAP33	Valve inlet assembly with 2 x 3/16 inch fittings; 2 metal sealed on-off valves mounted on 2 ¾ inch CF flange (DN 40 CF)

Extorr, Inc.

**307 Columbia Road
New Kensington, PA 15068**

Phone: 724-337-3000

www.extorr.com