


Single Valve Sampling Inlet



Description: XT Series Single Valve Sampling Inlet has one metal sealed on-off valve mounted on a DN 40 CF, 2 3/4 inch ConFlat (CF) flange with a Swagelok type nut and ferrule fitting for connecting the capillary tubing. The inlet assembly is made from 304 stainless steel. Stainless steel mounting hardware, and a 2 3/4 inch CF copper gasket.

Specifications

Material	304 stainless steel
Inlet Flange	2 3/4 inch CF (DN 40 CF) non-rotatable
Weight	1.50 lbs
Hardware Supplied	6 pcs 1/4 -28 x 1.5 inch SS bolts, nuts, flat washers, and 1 x 2 3/4 inch CF copper gasket
Inlet Valve	Metal sealed
Capillary Fitting	Swagelok type nut and ferrule

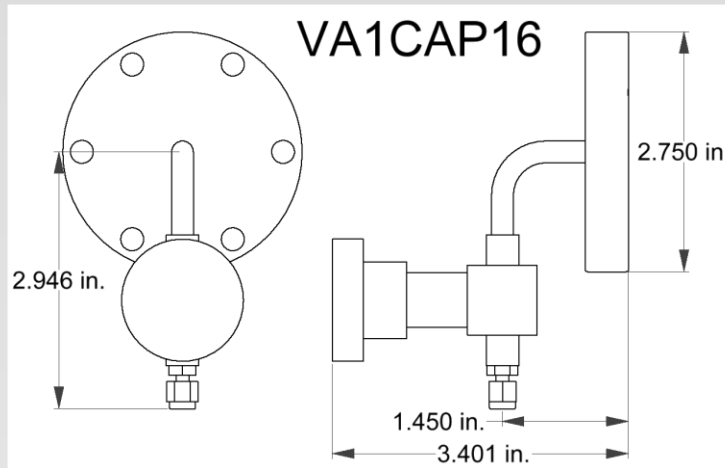

Ordering Information

Product Number	Description	Price
VA1CAP16	Valve inlet assembly with 1/16 inch fitting; single metal sealed on-off valve mounted on a 2 3/4 inch CF flange (DN 40 CF), vespel/graphite ferrule, and capillary plug	\$650.00
VA1CAP8	Valve inlet assembly with 1/8 inch fitting; single metal sealed on-off valve mounted on a 2 3/4 inch CF flange (DN 40 CF), vespel/graphite ferrule, and capillary plug	\$650.00
VA1CAP4	Valve inlet assembly with 1/4 inch fitting; single metal sealed on-off valve mounted on a 2 3/4 inch CF flange (DN 40 CF), vespel/graphite ferrule, and capillary plug	\$650.00
VA1CAP3	Valve inlet assembly with 3/16 inch fitting; single metal sealed on-off valve mounted on a 2 3/4 inch CF flange (DN 40 CF), vespel/graphite ferrule, and capillary plug	\$650.00

Extorr, Inc.
307 Columbia Road
New Kensington, PA 15068

Phone: 724-337-3000
www.extorr.com